



SCOPE OF WORKS

Exterior Painting Buildings only

DeCouto Ranges, 19 Tribe Road 1 & 24 Curving Avenue, Pembroke

Site #: 6009000 & 6010000

Please provide a quotation for labor to make the below repairs. BHC will supply all paint, bleach and bond contractor is expected to supply all tools and sundries.


1. **WALLS:** - Cost labour
 - a. Prepare walls thoroughly, by approved methods, to receive two (3) coats of paint as per Manufacturer's specifications. All exposed and bare concrete/stone surfaces must receive one (1) coat primer sealer prior to paint application as per Manufacturer's specifications.
 - b. Apply one (1) tinted primer and one (2) coats of finish paint as per Manufacturer's specifications. Color is to be Woodland Pearl (color change) for 19 Tribe Road 1 – back building and Blade (color change) for 24 Curving Avenue – front building as supplied by Pembroke Paint.
2. **WOODWORK, RAFTER FEET, SHUTTERS, BOUNDARY WALLS & TRIM:** - Cost labour
 - a. Clean, prepare by approved method, to receive two (2) coats of paint as per Manufacturer's specifications. All exposed and bare wood surfaces must receive one (1) coat primer undercoat prior to paint application as per Manufacturer's specifications.
 - b. Apply two (2) coats of finish paint as per Manufacturer's specifications. Woodworks and trim are to Gloss White.
 - c. Boundary and property walls outbuildings, pump rooms are to match the house color, with white trim if any. The decorator concrete block is to be painted white to accent porches.
3. **PORCHES & WALKWAYS:** – Cost labour:
 - a. Pressure Wash – and clean porch cement and tile areas and walkways.

**SPECIAL CARE AND ATTENTION TO BE GIVEN TO COVER ALL
HEDING AND TENANTS BELONGINGS AS NEEDED.
TO CLEAN, TIDY AND REMOVE ALL DEBRIS FROM SITE.**



Bermuda Housing Corporation
P.O. Box HM 662, Hamilton, HM CX Bermuda
Telephone (441) 295-8623, Fax (441) 295-2605

Google Maps

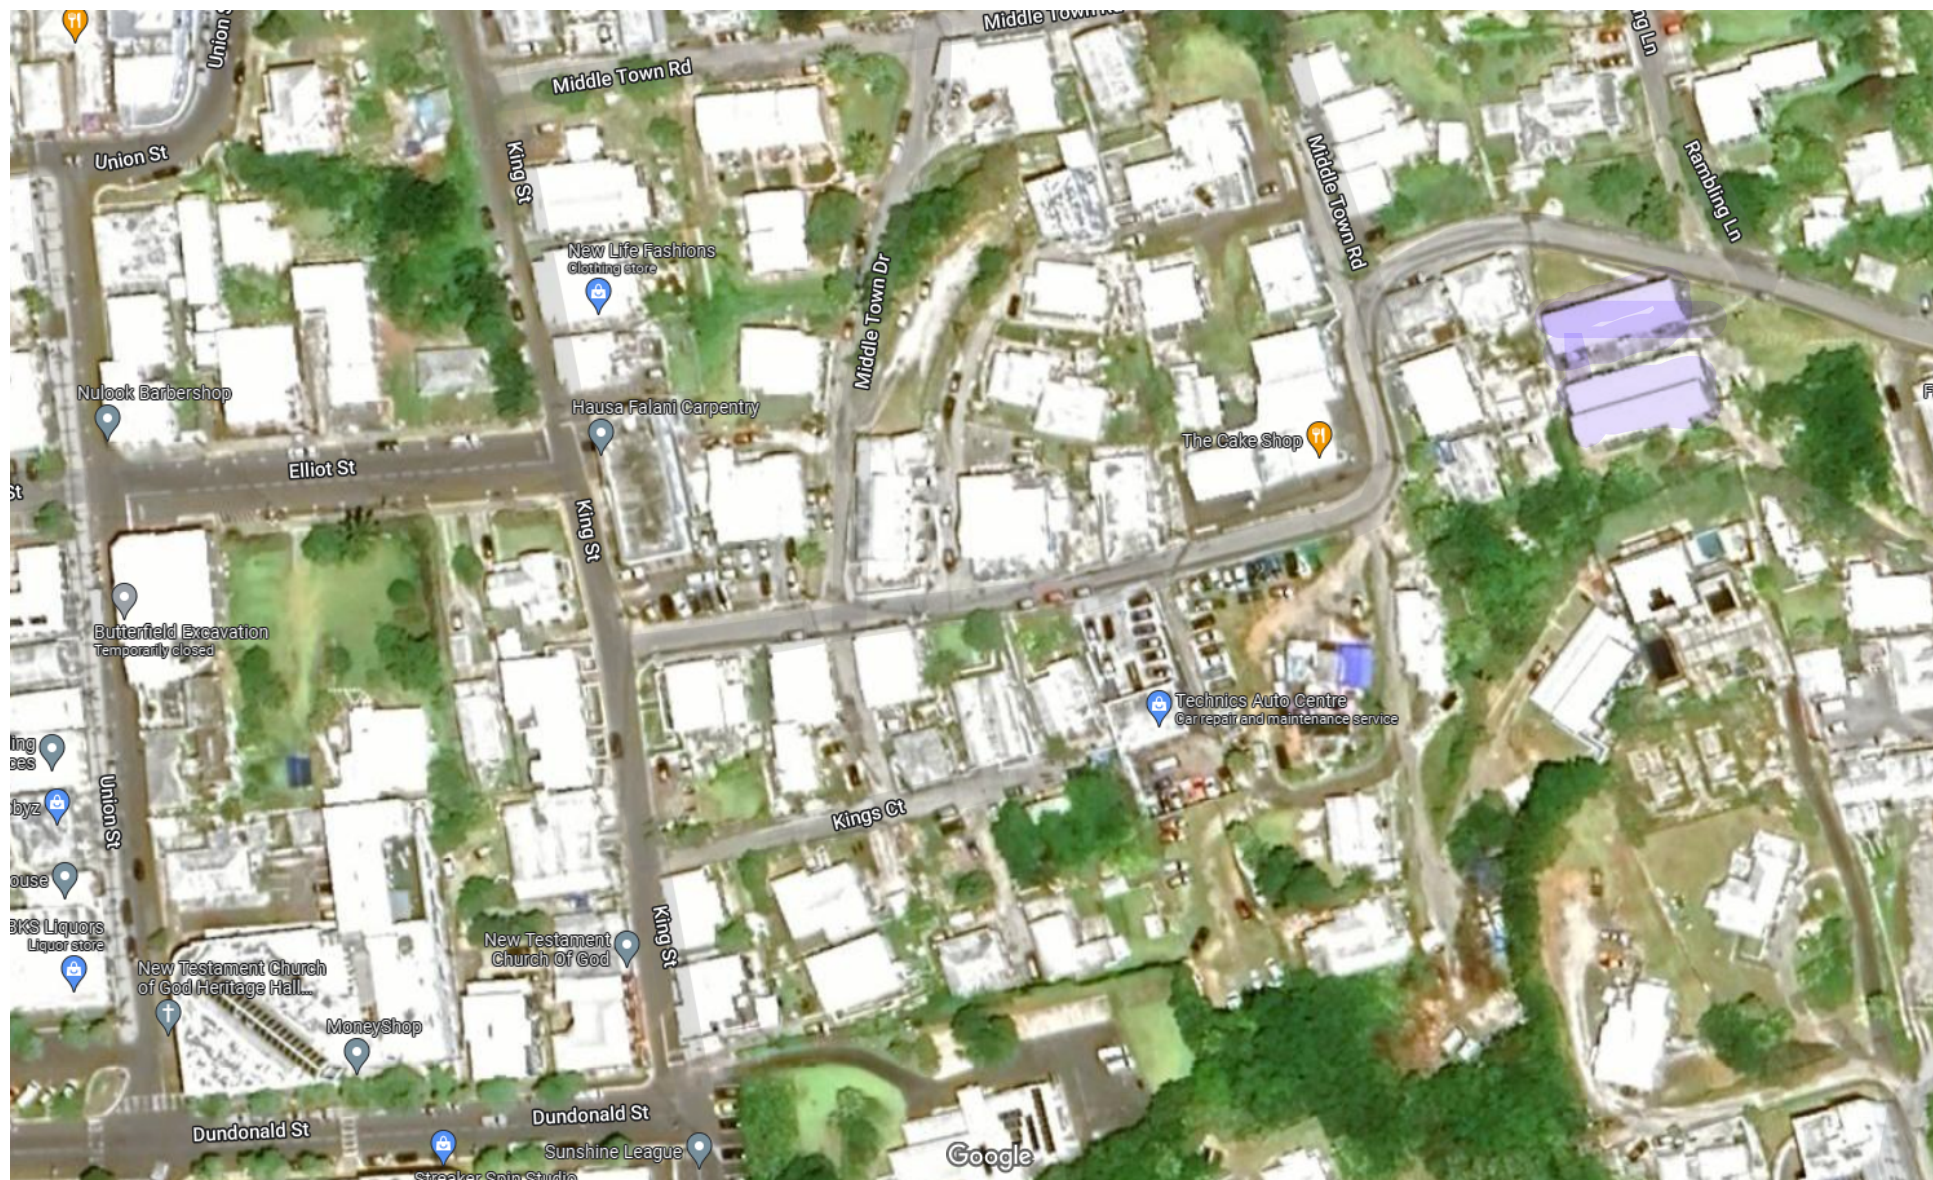

Imagery ©2022 Airbus, CNES / Airbus, Maxar Technologies, Map data ©2022 20 m